

630A MCCB Panelboard

General Characteristics

IP Rating	630A
Paint Specification	IP3X
Conditional Short Circuit Rating	RAL 7035 epoxy powder coating
Short Circuit Withstand Rating	50kA to BS EN 61439-1
	50kA – 1s to BS EN 61439-1

Cable Capacities

MCCB/SwD incoming device	2 x 240mm ² *** (M12 stud)
Incoming earth terminal	M10
Incoming neutral terminal	M12
Outgoing earth terminal	70mm ² (18)
Outgoing neutral terminal	70mm ² (20)
MCCB outgoing device	16A-160A = 70mm ² , 200-250A = 150mm ²

- * Recommended 120mm²
- ** Recommended 1 x 240mm²
- *** Recommended 2 x 185mm²


Dimensions

MCCB Panel Board						
	Ways	Part No	A (mm)	B (mm)	C (mm)	D (mm)
250A	4	PSB254	888	700	782	564
	6,8	PSPB256/PSPB258	1034	700	940	654
	12	PSPB2512	1190	700	1097	564
400A	6	PSPB406	1055	700	922	500
	12	PSPB412	1295	700	1160	500
	18	PSPB418	1530	700	1396	500
630A	6	PSPB636	1175	850	1043	650
	8	PSPB638	1255	850	1122	650
	12	PSPB6312	1415	850	1280	650

Note: Depth for 250A, 400A, 630A = 197mm

Catalogue No'S.

Description	Rating	No. Ways	Part No.
6 way MCCB panelboard	630A	4+2	PSPB636
8 way MCCB panelboard	630A	6+2	PSPB638
12 way MCCB panelboard	630A	10+2	PSPB6312

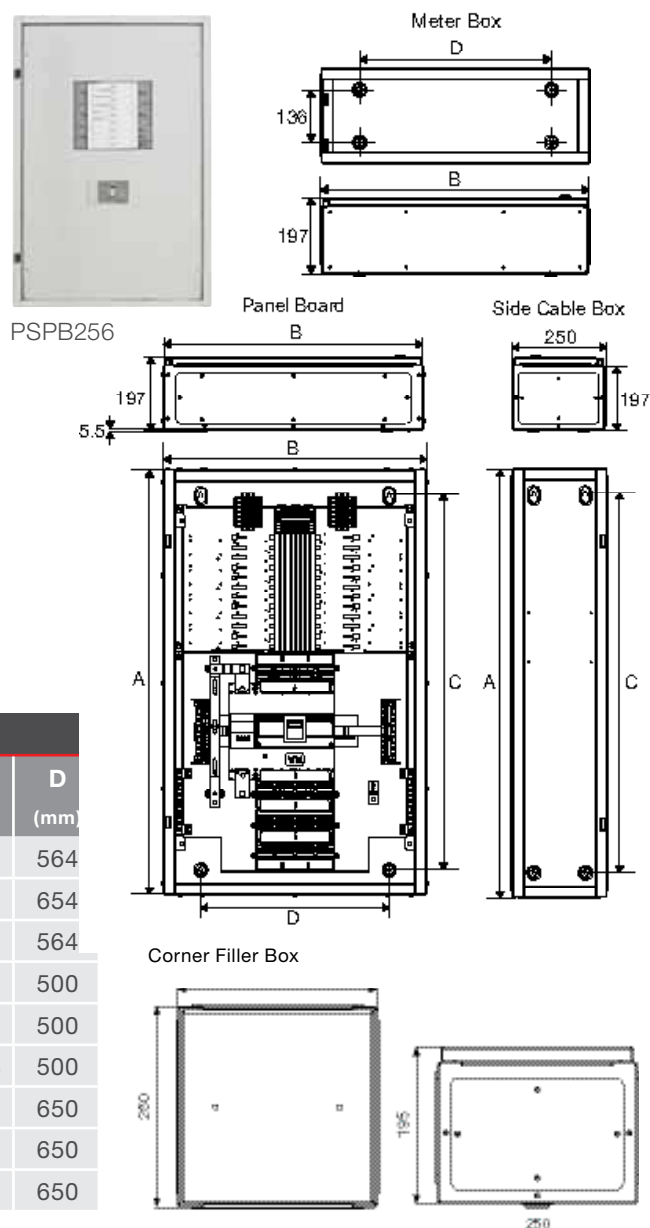

HAVELLS